



## 2836341 - Street light cabinet UNI-GAT16

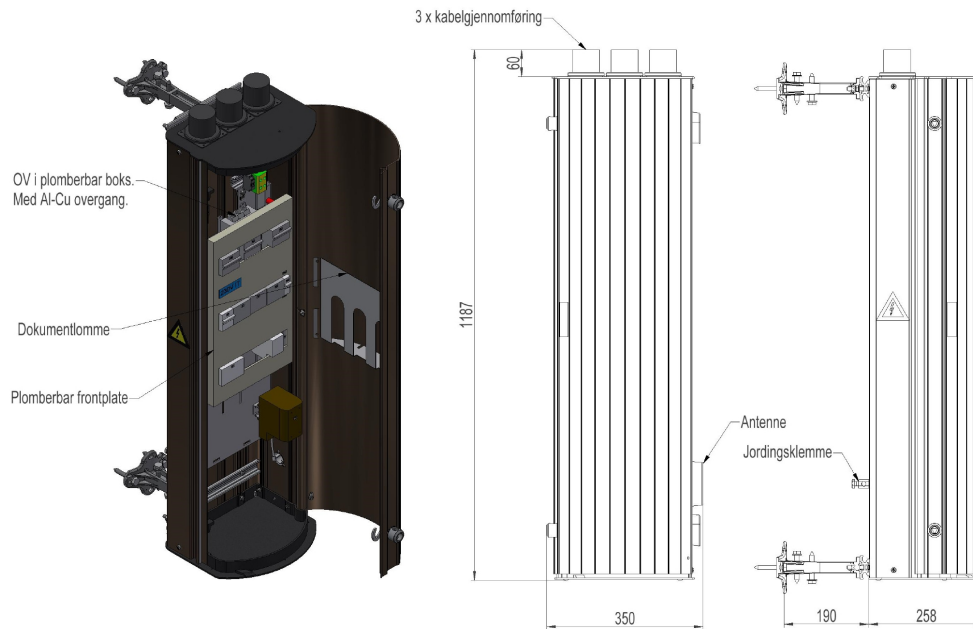

Description	Street light cabinet with two contactor controlled 16A outputs, for 230V IT-grid. Cable entry in top. Equipped with 50A main breaker, 100mA earth fault circuit breaker, GSM antenna and mounting brackets for wooden pole.
Unit	PSC
Weight	20 kg
Material	Aluminium, anodised-brown
Voltage/System configuration	230V IT
Fastening method	Pole/Wall
Degree of protection (IP)	IP44
Output antenna	MCX-m

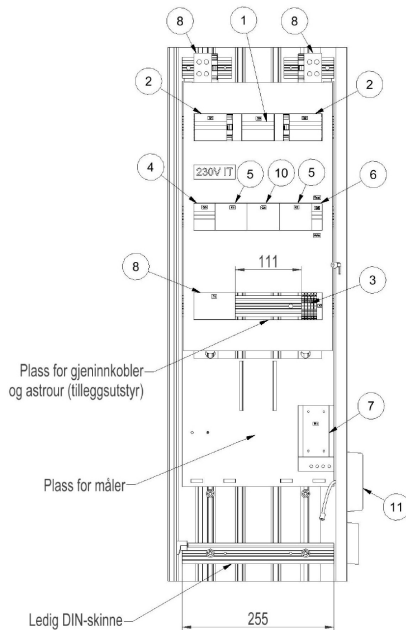

Bestykning			
Pos.nr	Tag.nr i skjema	Matriell	Egenskaper
1	Q0	Overbelastningsvern (OV) i plomberbar boks	3x50A Icu=10kA
2	Q1 og Q2	Automatsikring for utgående kurs	3x16A C-karakteristikk Icu=10kA
3	X1	Rekkeklemmer	0,25-4mm <sup>2</sup>
4	Q3	Automatsikring for styrestrom	C-karakteristikk 10A Icu=10kA
5	K1 og K2	Kontaktor for utgående kurs	63A 4-polt 230V
6	Q5	Bryter for auto/test	1-polt 20A
7	T1	Varmeelement	50W med termostat
8	F1	Jordfeilbryter	63A 4-polt 100mA jordfeilstrom
9		Jordingsklemme	Dobbel 6-50mm <sup>2</sup>
10		Overspenningsvern	Uc: 440V In: 20kA Im: 40kA Um: 2kV
11		Antenne	Vandalsikker IP67 Bånd: 2G/3G/4G/NB IoT Frekvensområde: 790Mhz-960Mhz 170Mhz-2690Mhz Tilkobling: MCX-m Plassering: Topp
		Jordtilkobling	Utvendig: 50mm <sup>2</sup>
		Dørlås	Låsbar trekantlås
		Kabelgjennomføringer i topp	3 stk ø15-40mm