



**2836612 - Forankr.trav TF2015-07-3S**

|                  |                              |
|------------------|------------------------------|
| Mastetype        | H/A-mast                     |
| Masteavstand     | 2m                           |
| Faseavstand      | 1,5m                         |
| Stolpeinnfesting | Bolt, 280mm-enkel masteklave |

**Traversprofil P3 (liggende)**

|                                               |                                                           |
|-----------------------------------------------|-----------------------------------------------------------|
| Vekt: (kg/m)                                  | 11.238                                                    |
| Areal: (mm <sup>2</sup> )                     | 4162                                                      |
| Materiale:                                    | Aluminiumsprofil, bruneloksert                            |
| Legering:                                     | AlMgSi 6082-T6                                            |
| Motstandsmoment: (mm <sup>3</sup> )           | W <sub>x</sub> = 114 771<br>W <sub>y</sub> = 176 412      |
| Annet arealmoment: (mm <sup>4</sup> )         | I <sub>x</sub> = 6 593 950<br>I <sub>y</sub> = 14 286 921 |
| Senteravstand for I <sub>x</sub> : (mm)       | C <sub>x</sub> = 57,45                                    |
| Senteravstand for I <sub>y</sub> : (mm)       | C <sub>y</sub> = 80,99                                    |
| Minimum flytegrense 0,2: (N/mm <sup>2</sup> ) | 250                                                       |
| Minimum bruddgrense: (N/mm <sup>2</sup> )     | 290                                                       |

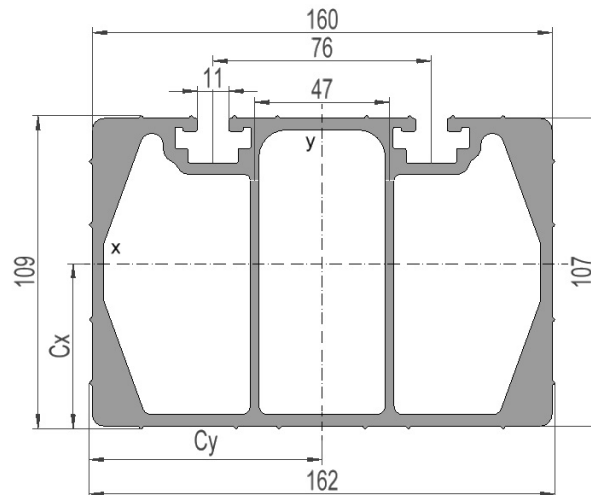

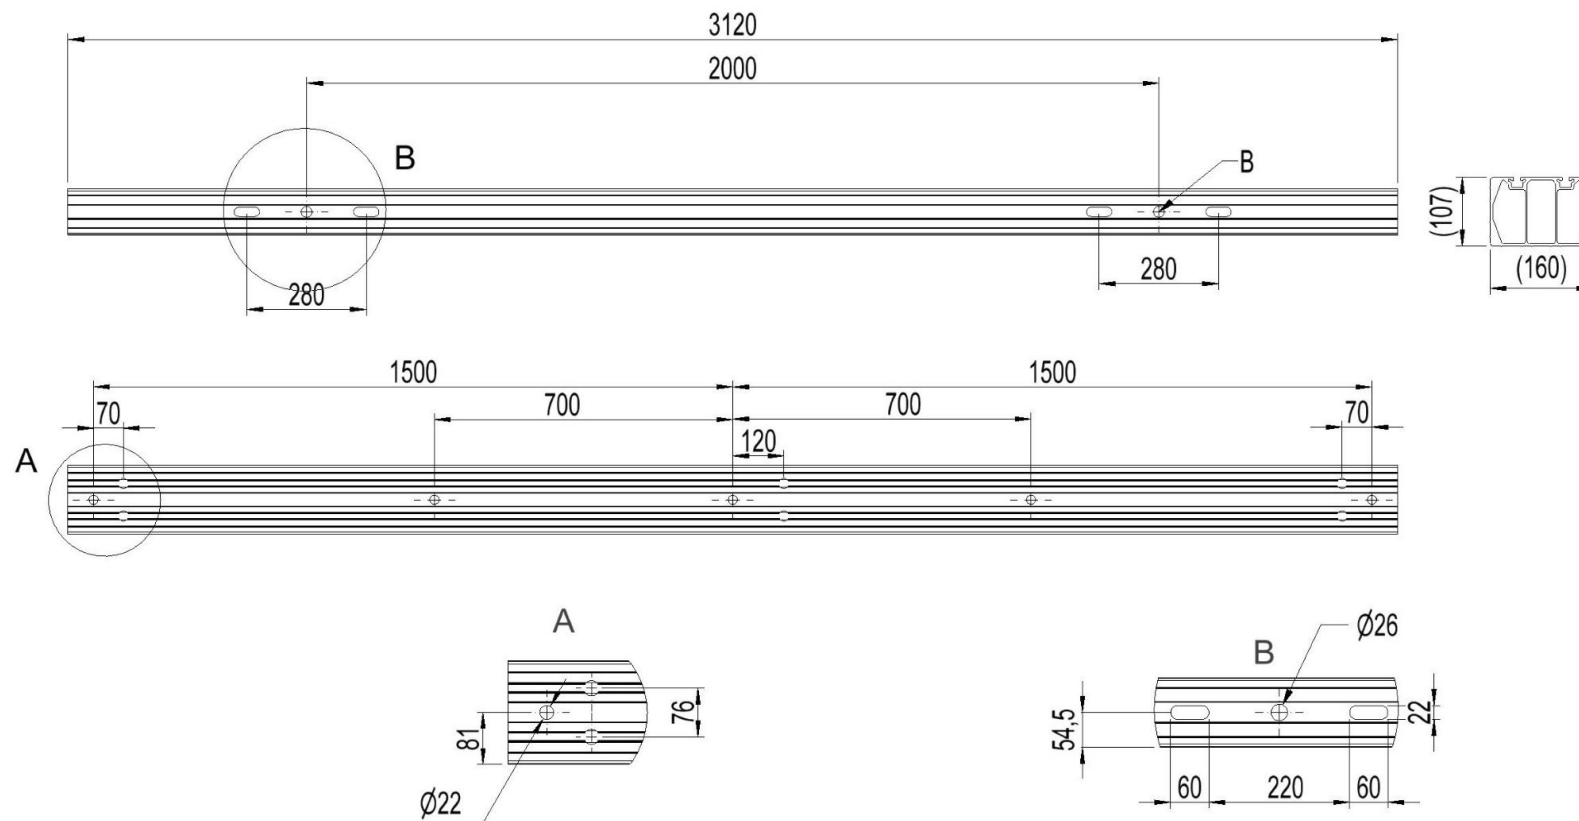

**Lastdiagram m.h.p flytegrense**

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

