



2836682 - Bæretravers T2525D-34-4S

Mastetype	H/A-mast
Masteavstand	2,5m
Faseavstand	2,5m
Stolpeinnfesting	340mm-dobbel masteklave

Traversprofil P4 (stående)


Vekt: (kg/m)	6.438
Areal: (mm ²)	2385
Materiale:	Aluminiumsprofil, bruneloksert
Legering:	AlMgSi 6005A-T6
Motstandsmoment: (mm ³)	W _x = 120 354 W _y = 42 751
Annet arealmoment: (mm ⁴)	I _x = 10 178 454 I _y = 1 496 283
Senteravstand for I _x : (mm)	C _x = 84,57
Senteravstand for I _y : (mm)	C _y = 35,00
Minimum flytegrense 0,2: (N/mm ²)	215
Minimum bruddgrense: (N/mm ²)	255

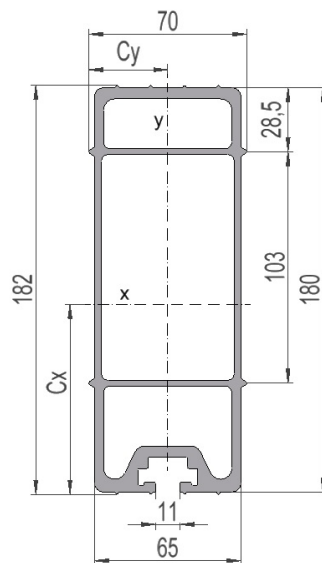

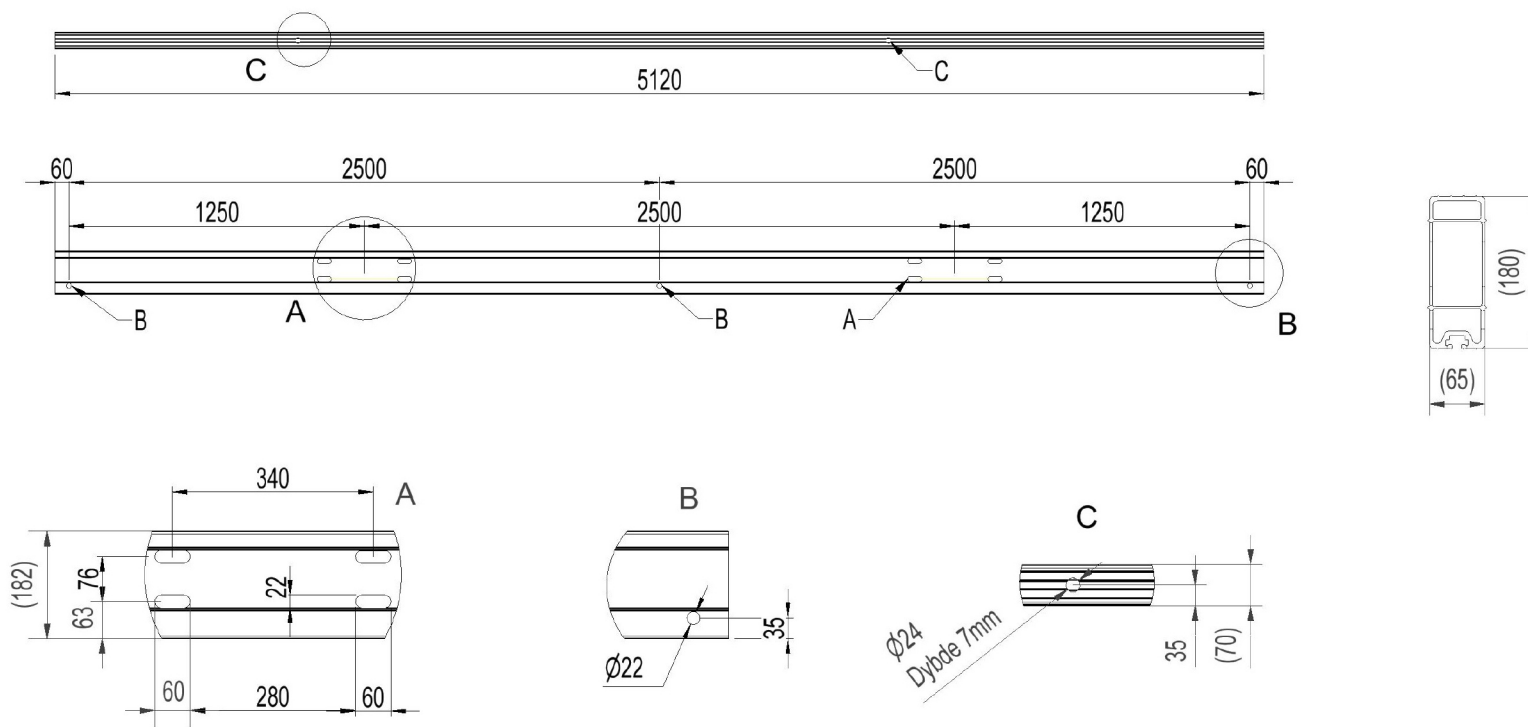

Lastdiagram m.h.p flytegrense

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

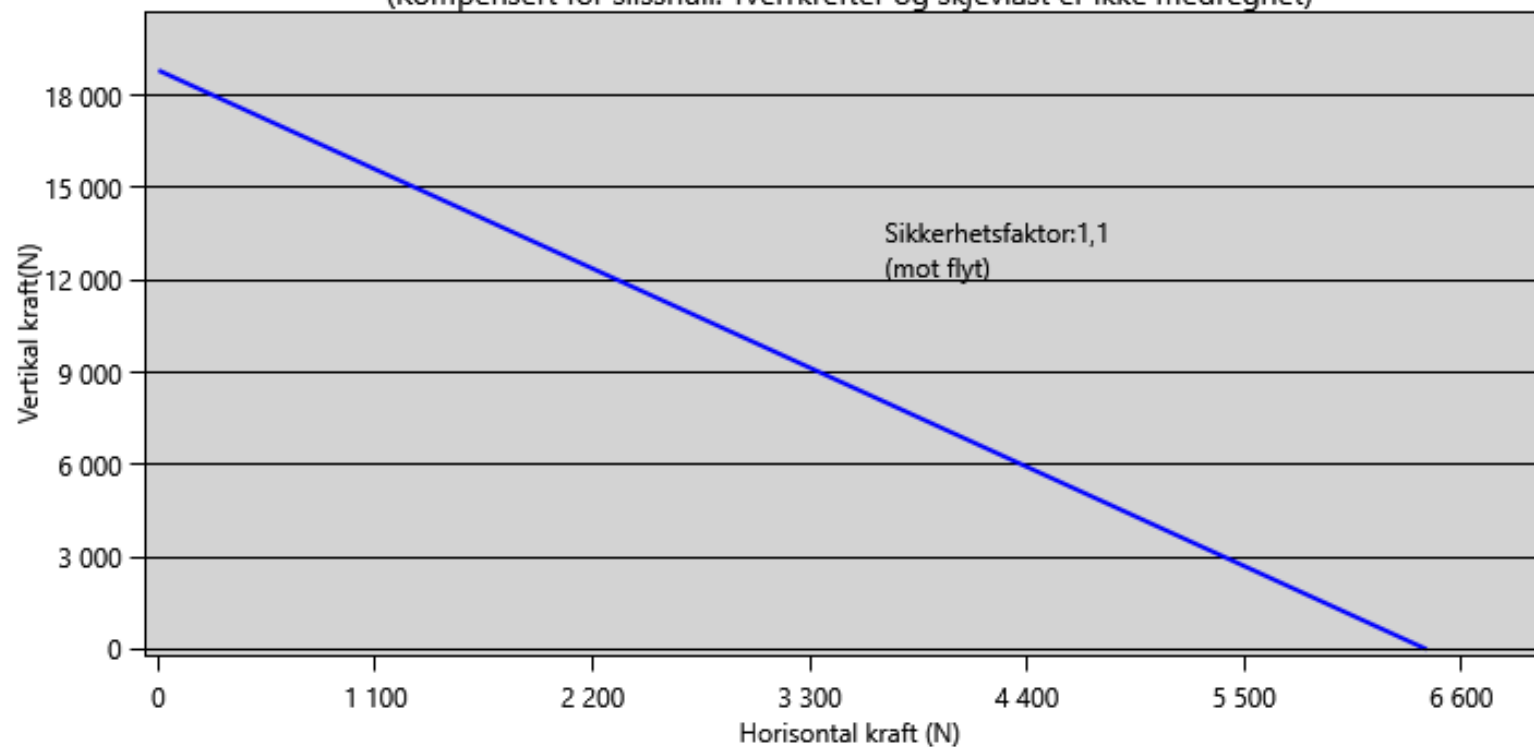

Total nedbøyning travers i forhold til last

