



**2836698 - Bæretravers T4545-34-9S**

|                  |                        |
|------------------|------------------------|
| Mastetype        | H/A-mast               |
| Masteavstand     | 4,5m                   |
| Faseavstand      | 4,5m                   |
| Stolpeinnfesting | 340mm-enkel masteklave |

**Traversprofil P9 (stående)**


|                                               |                                                           |
|-----------------------------------------------|-----------------------------------------------------------|
| Vekt: (kg/m)                                  | 15.455                                                    |
| Areal: (mm <sup>2</sup> )                     | 5724                                                      |
| Materiale:                                    | Aluminiumsprofil, bruneloksert                            |
| Legering:                                     | AlMgSi 6082-T6                                            |
| Motstandsmoment: (mm <sup>3</sup> )           | W <sub>x</sub> = 373 840<br>W <sub>y</sub> = 154 772      |
| Annet arealmoment: (mm <sup>4</sup> )         | I <sub>x</sub> = 49 796 982<br>I <sub>y</sub> = 7 738 580 |
| Senteravstand for I <sub>x</sub> : (mm)       | C <sub>x</sub> = 133,20                                   |
| Senteravstand for I <sub>y</sub> : (mm)       | C <sub>y</sub> = 50,00                                    |
| Minimum flytegrense 0,2: (N/mm <sup>2</sup> ) | 250                                                       |
| Minimum bruddgrense: (N/mm <sup>2</sup> )     | 290                                                       |

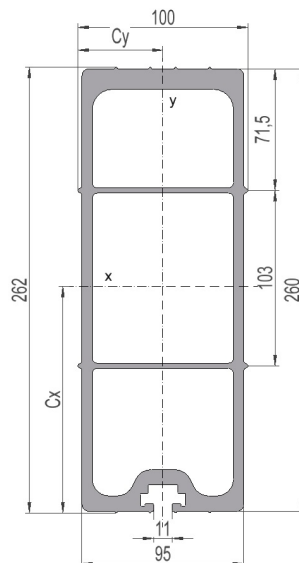

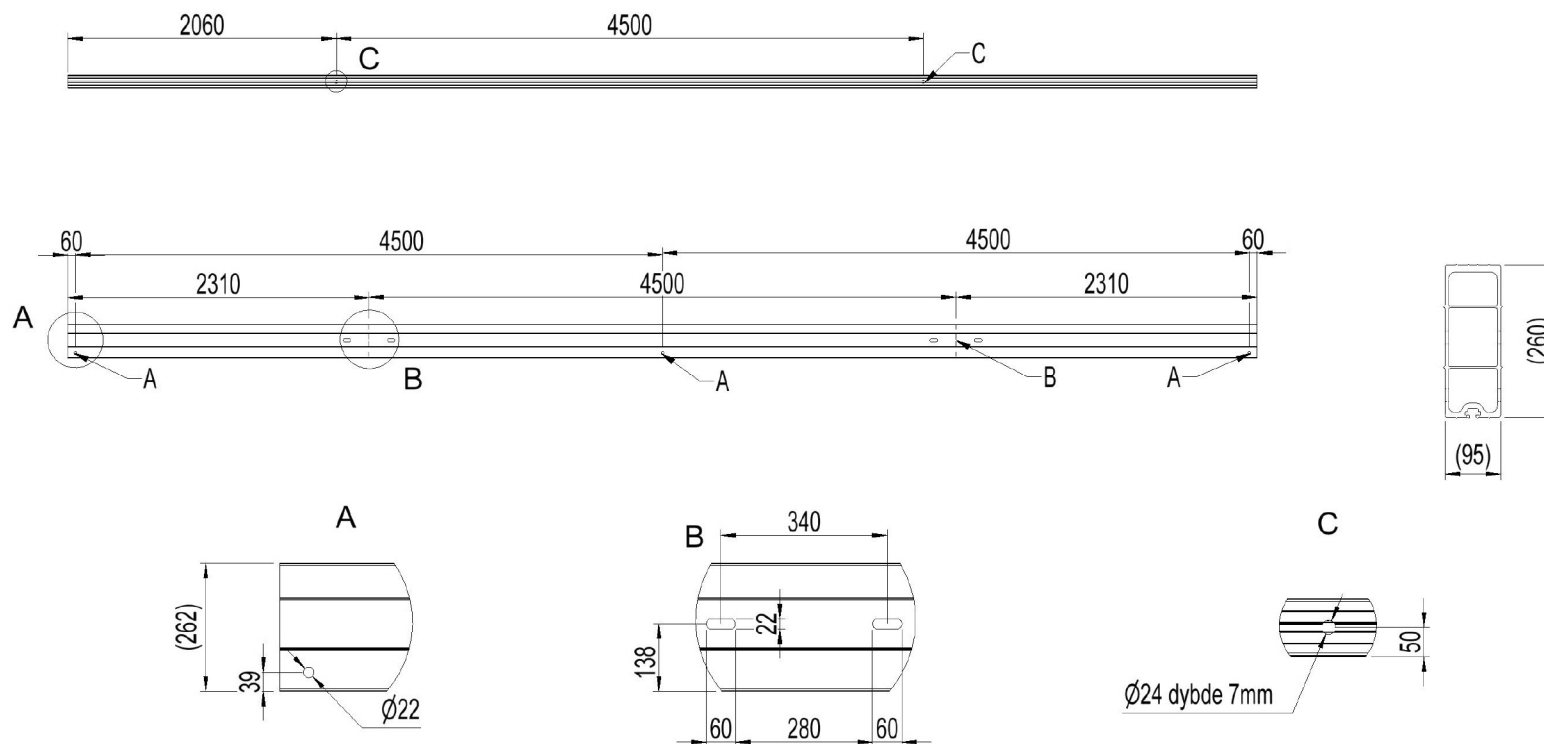

**Lastdiagram m.h.p flytegrense**

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

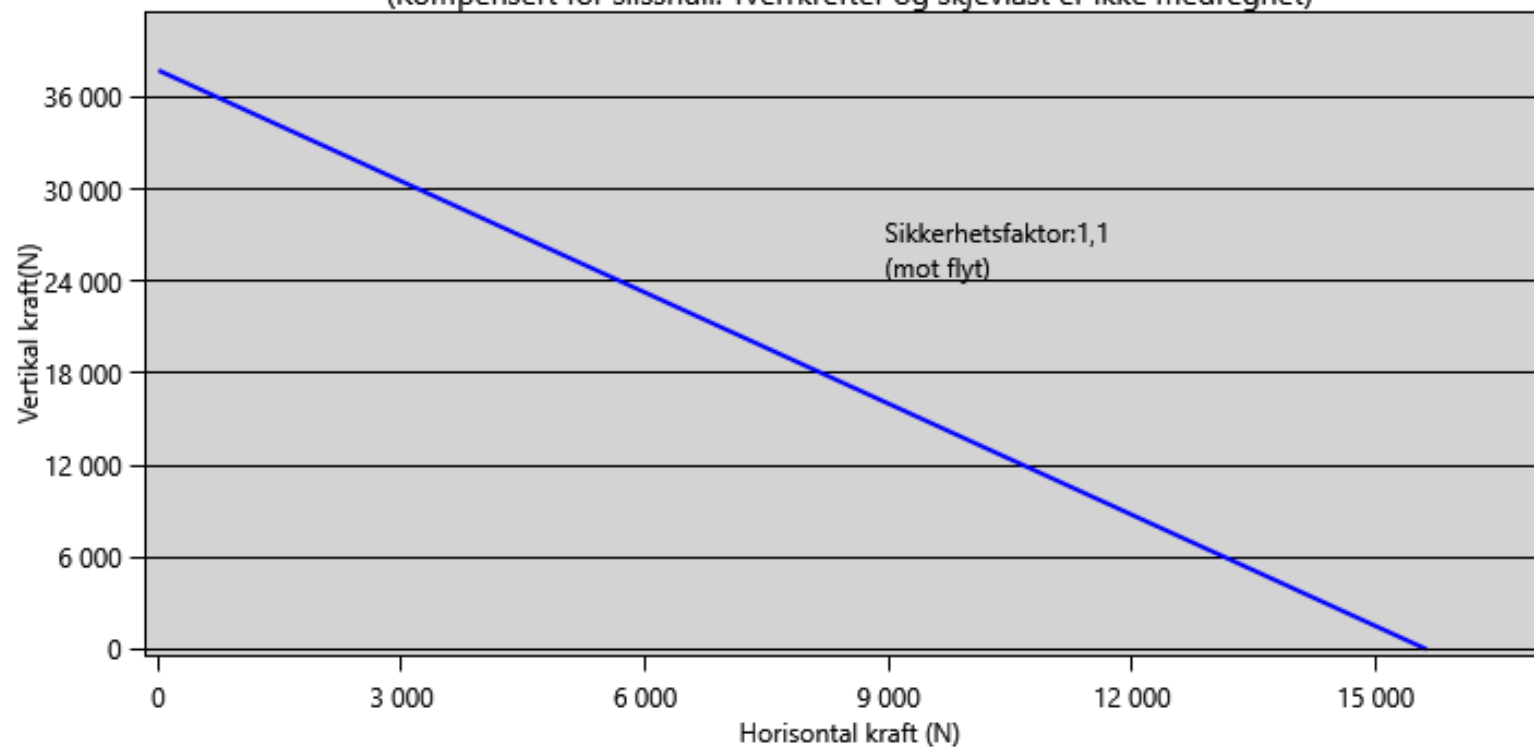

**Total nedbøyning travers i forhold til last**