



2836874 - Anch. crossbar TF215S

Cross arm type	H/A-pole
Pole distance	2m
Phase distance	1,5m
Pole fastening	Bolt, 280mm-single poleclamp

Crossbar profile P2 (laying)

Weight: (kg/m)	6.707
Cross section: (mm2)	2484
Material:	Extruded aluminum, brown anodized
Alloy:	AlMgSi 6082-T6
Moment of resistance: (mm3)	W _x = 46 031 W _y = 77 773
Area moment of inertia: (mm4)	I _x = 2 038 074 I _y = 4 744 150
Center distance for I _x : (mm)	C _x = 44,28
Center distance for I _y : (mm)	C _y = 61,00
Minimum yield strength 0,2: (N/mm2)	250
Minimum breaking load: (N/mm2)	290

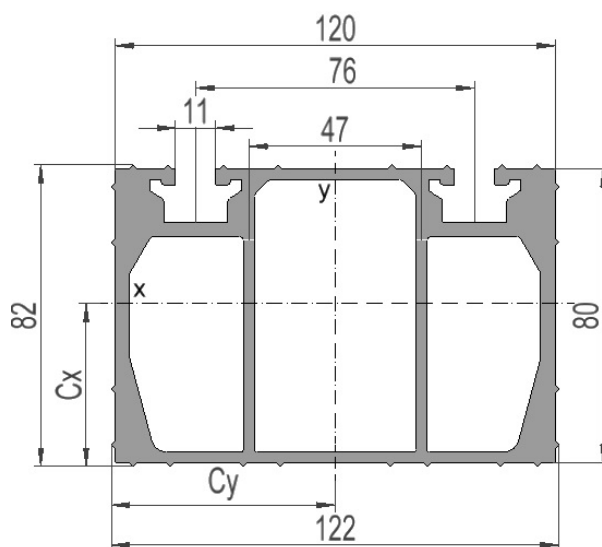

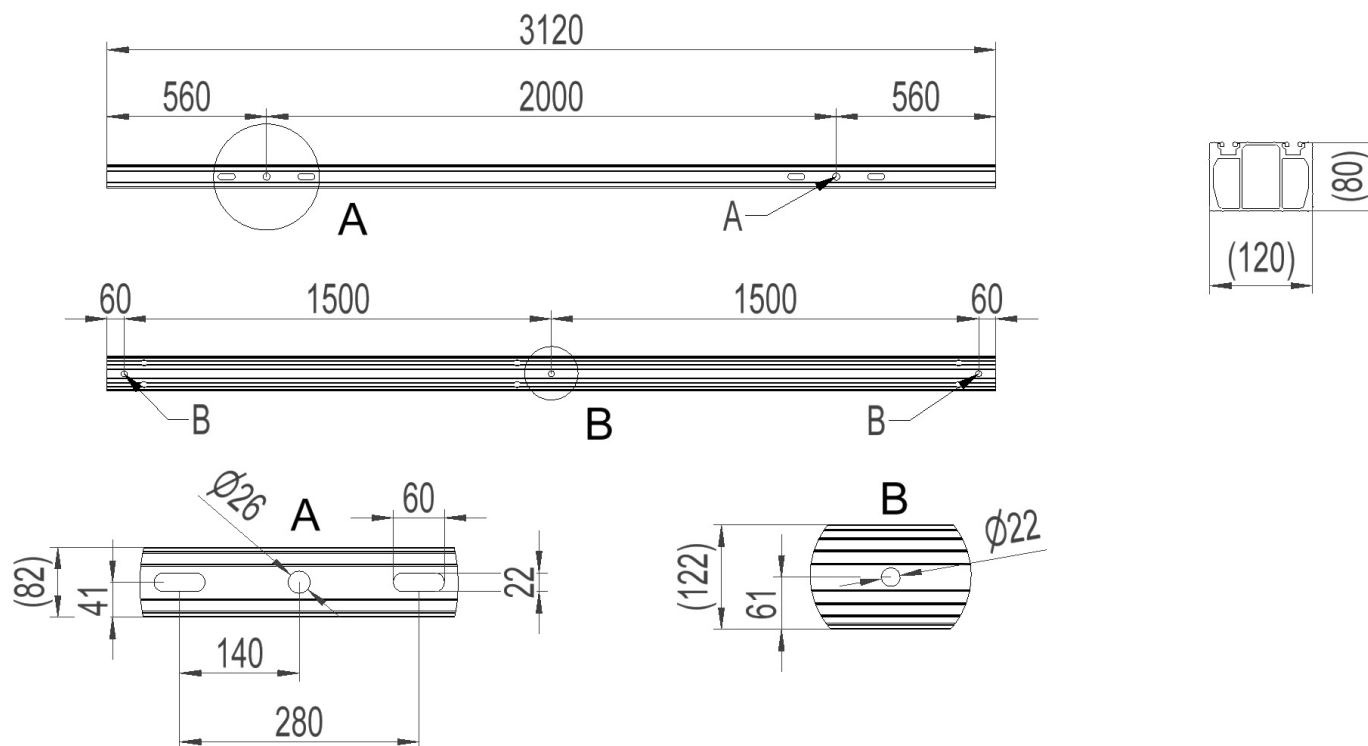

Lastdiagram m.h.p flytegrense

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

