



2836886 - Forankr.trav TF18S

Mastetype	H/A-mast
Masteavstand	1m
Faseavstand	0,8m
Stolpeinnfesting	Bolt, 280mm-enkel masteklave

Traversprofil P2 (liggende)


Vekt: (kg/m)	6.707
Areal: (mm ²)	2484
Materiale:	Aluminiumsprofil, bruneloksert
Legering:	AlMgSi 6082-T6
Motstandsmoment: (mm ³)	W _x = 46 031 W _y = 77 773
Annet arealmoment: (mm ⁴)	I _x = 2 038 074 I _y = 4 744 150
Senteravstand for I _x : (mm)	C _x = 44,28
Senteravstand for I _y : (mm)	C _y = 61,00
Minimum flytegrense 0,2: (N/mm ²)	250
Minimum bruddgrense: (N/mm ²)	290

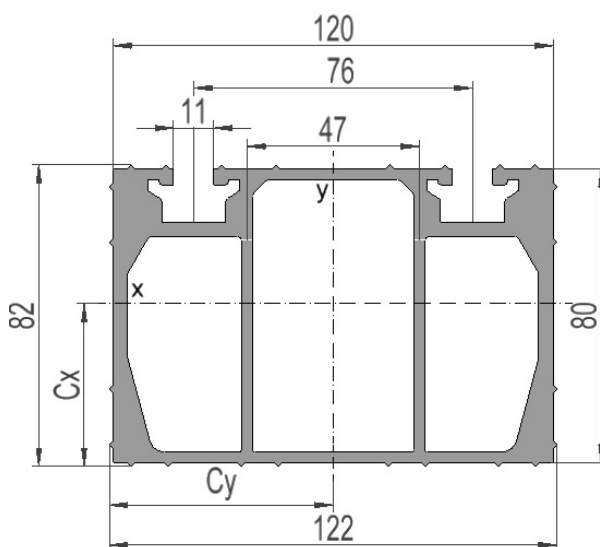

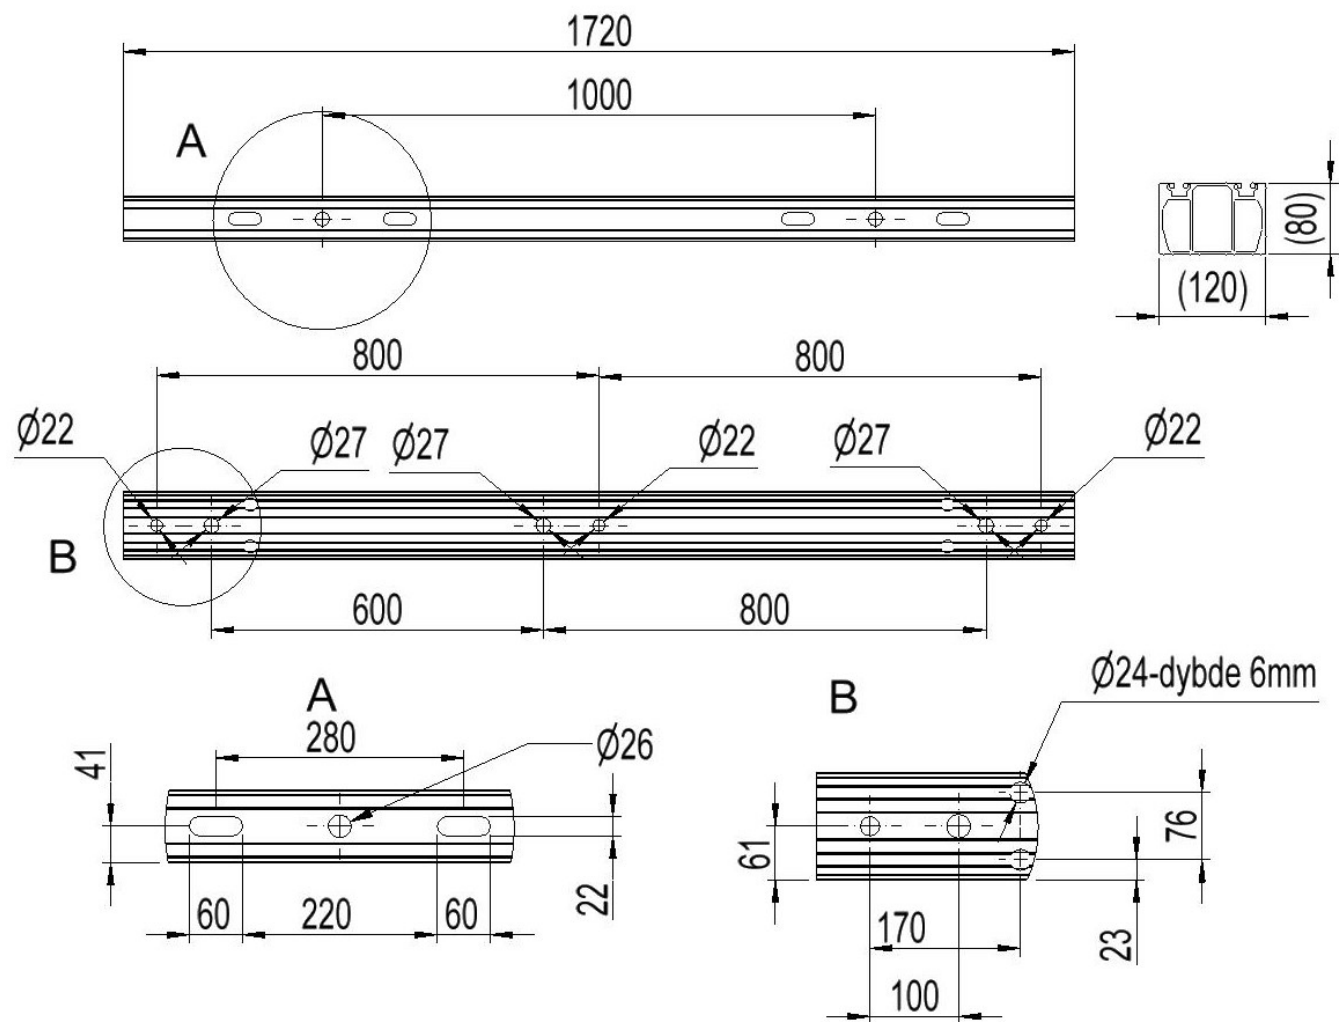

Lastdiagram m.h.p flytegrense

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

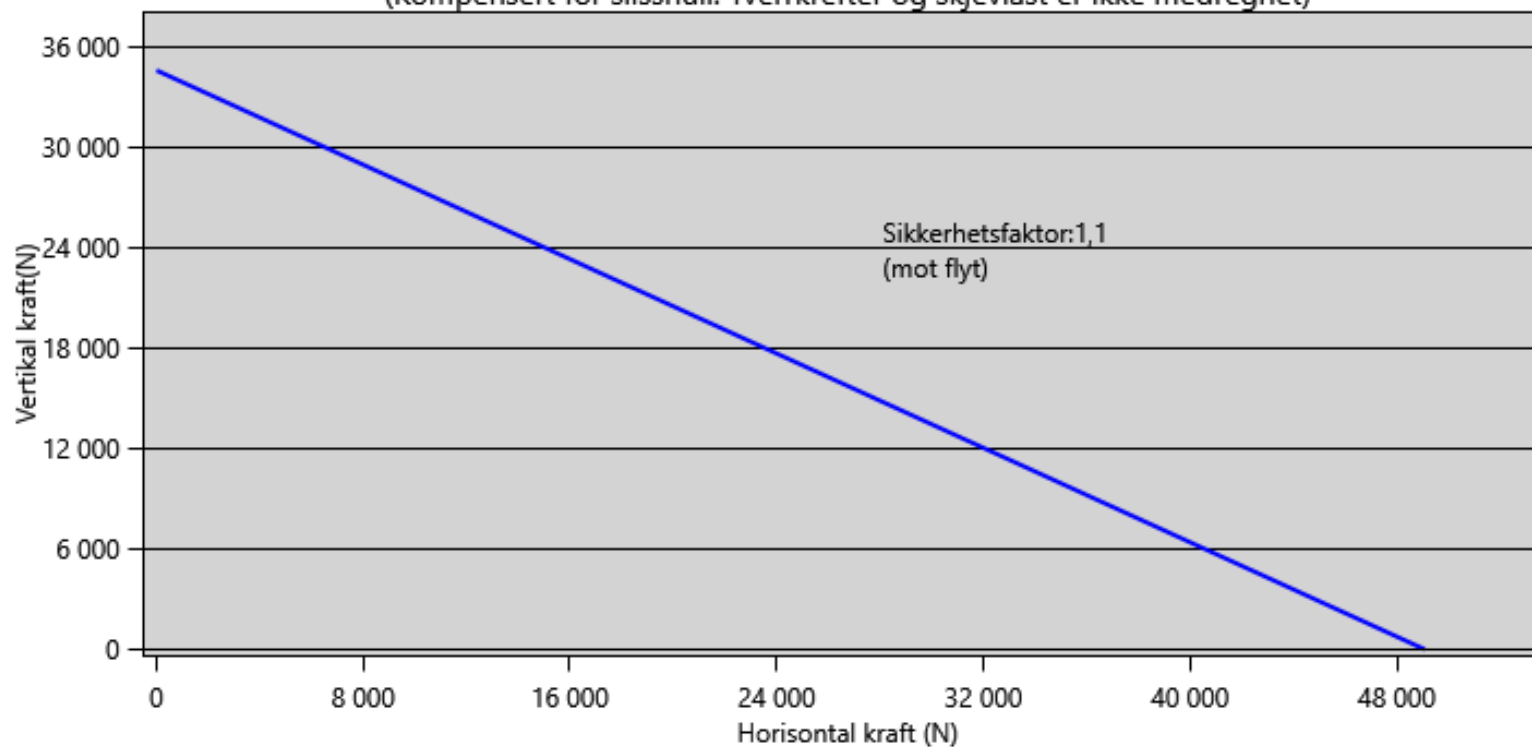

Total nedbøyning travers i forhold til last

