



**2859402 - Anch. crossbar TAS4545BH-7S**

|                |                       |
|----------------|-----------------------|
| Cross arm type | H-pole                |
| Pole distance  | 4,5m                  |
| Phase distance | 4,5m                  |
| Pole fastening | Bolt with bolt sleeve |

**Crossbar profile P7 (standing)**


|                                                  |                                                            |
|--------------------------------------------------|------------------------------------------------------------|
| Weight: (kg/m)                                   | 22.255                                                     |
| Cross section: (mm <sup>2</sup> )                | 8243                                                       |
| Material:                                        | Extruded aluminum, brown anodized                          |
| Alloy:                                           | AlMgSi 6082-T6                                             |
| Moment of resistance: (mm <sup>3</sup> )         | W <sub>x</sub> = 550 278<br>W <sub>y</sub> = 345 747       |
| Area moment of inertia: (mm <sup>4</sup> )       | I <sub>x</sub> = 67 111 384<br>I <sub>y</sub> = 28 524 112 |
| Center distance for I <sub>x</sub> : (mm)        | C <sub>x</sub> = 121,96                                    |
| Center distance for I <sub>y</sub> : (mm)        | C <sub>y</sub> = 82,50                                     |
| Minimum yield strength 0,2: (N/mm <sup>2</sup> ) | 250                                                        |
| Minimum breaking load: (N/mm <sup>2</sup> )      | 290                                                        |

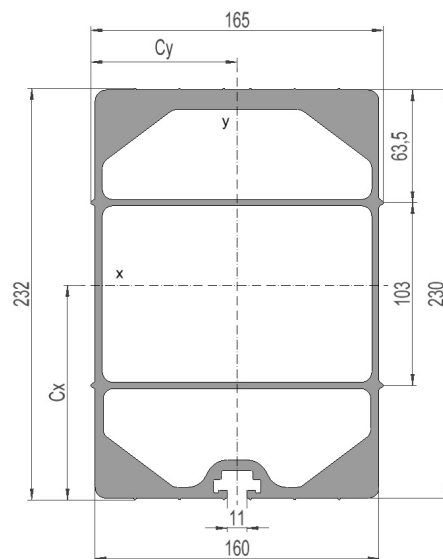

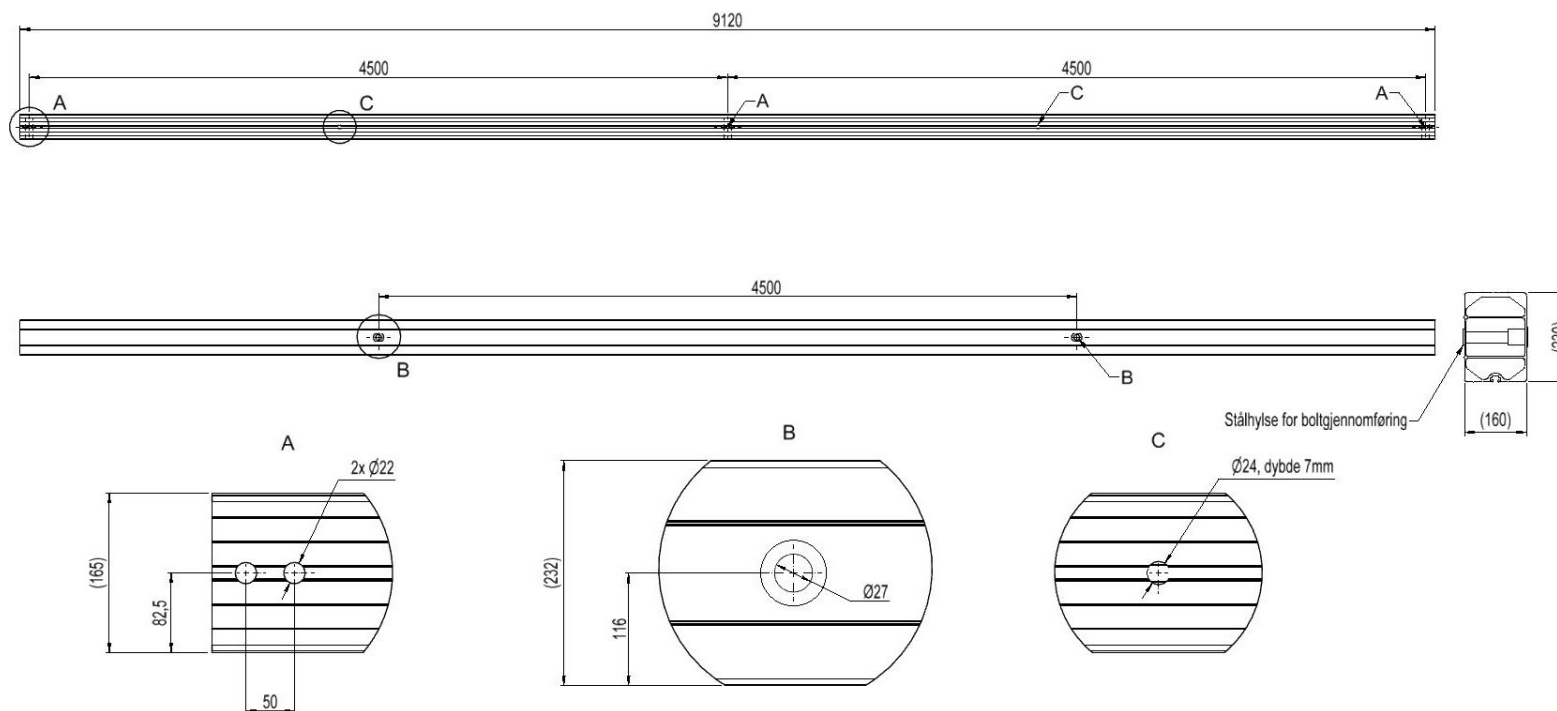

**Lastdiagram m.h.p flytegrense**

(Kompensert for slisshull. Tverrkrefter og skjevlast er ikke medregnet)

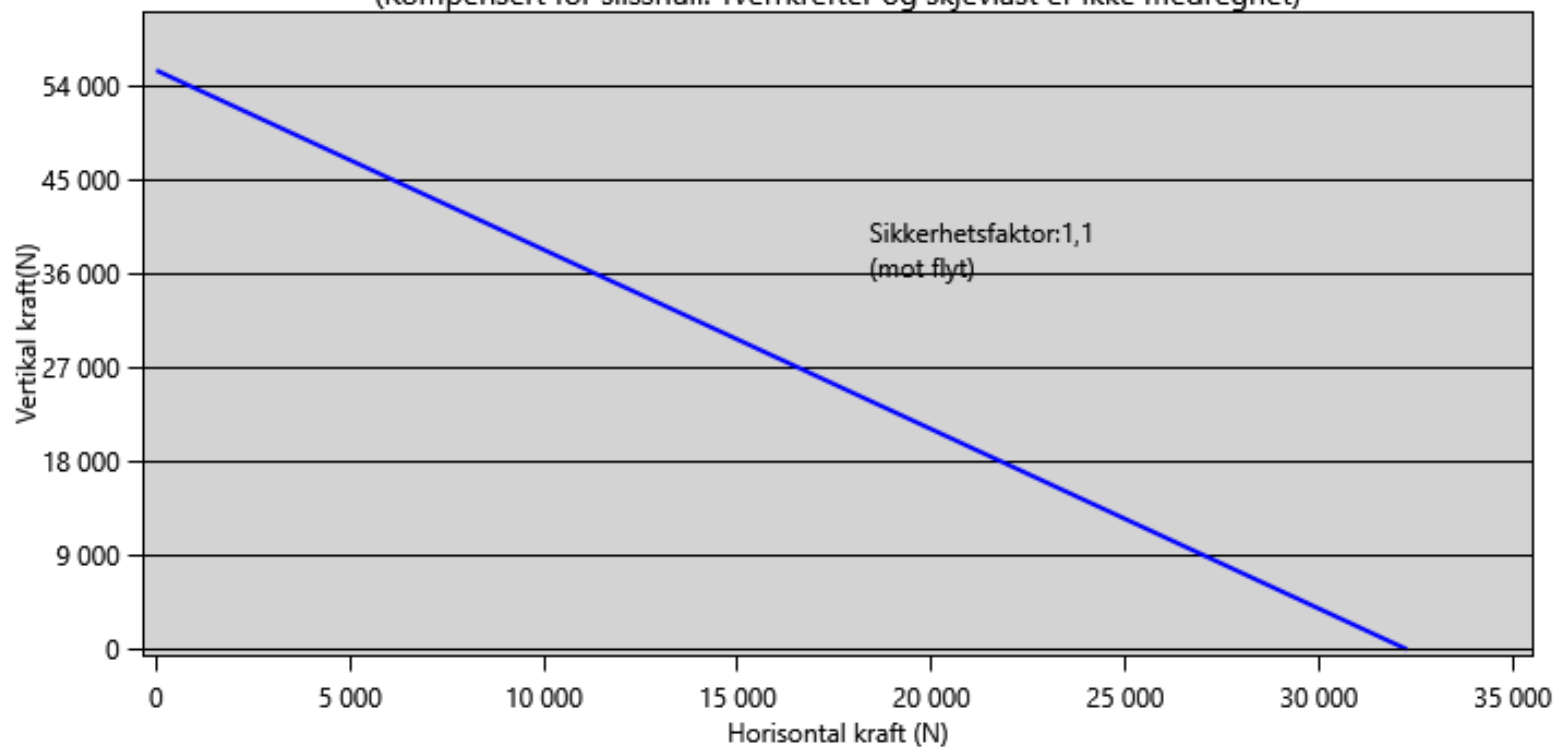

## Total nedbøyning travers i forhold til last

