



2836398 - Motordrive BL-24-230-FSB-AL6093

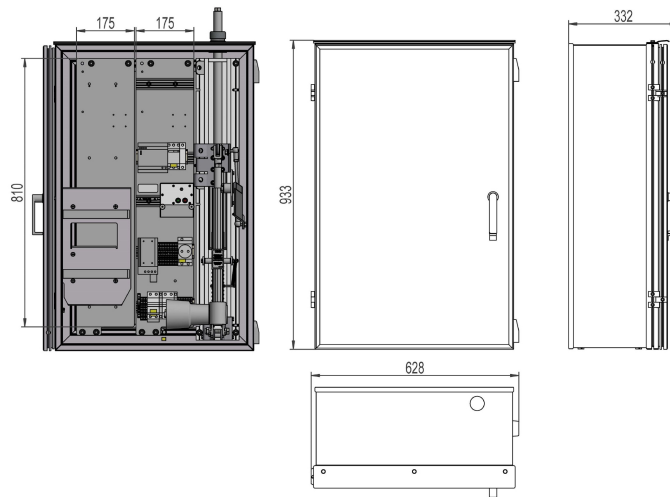

Description	Outdoor Motordrive for disconnecter / breaker. With "quick connect" function, large battery mounting and battery charger. 250mm actuator movement. 175mm wide mounting plate for communication system. Aluminium cabinet 600x920x300mm.
Unit	PSC
Weight	40 kg
Material	Aluminium
Degree of protection (IP)	IP44

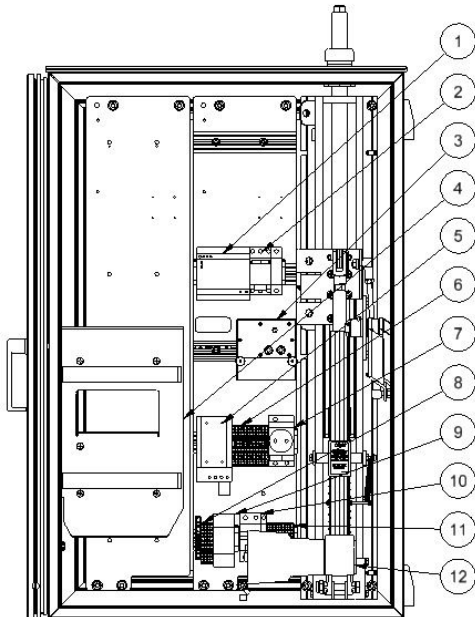

Bestykning

Pos.nr	Tag.nr i skjema 07-A0693	Matriell	Egenskaper
1	LA1	Batterilader	24VDC
2	F2	Motorvembryter	Instilt på 3,5A med hjelpekontakt
3	Q2	Kontrollenhet	Med vender for lokal/fjern og betjening aktuator
4		Batterifeste	For 2x38Ah
5	T1	Varmeelement	50W med termostat
6	X3	Rekkeklemmer	0,25-4mm ²
7	Z1	Stikkontakt	Jordet
8	X1	Rekkeklemmer	0,25-4mm ²
9	Q1	Overspenningsvern	Uc: 440V In: 20kA Im: 40kA Up: 2kV Klasse 2
10	F1	Automatsikring	C-karakteristikk 4A Icu=25kA/230V
11	X2	Rekkeklemmer	0,25-4mm ²
12	M1	Aktuator	Hastighet: 32-24mm/s Kraft: 2500N Imaks: 9A